

2-dielny guľový kohút s ISO prírubou a uzamykateľnou pákou

Model: BAV-211-T-SS



Dimenzia: DN8 až DN50 (1/4" až 2")

Nominálny tlak: PN63


Pripojenie: Závitové BSP podľa ISO 7/1

Teplota: -25°C + 180°C

Materiál: Nerez 1.4408 / 316 / CF8M


Ovládanie: Ručná páka s uzamykaním




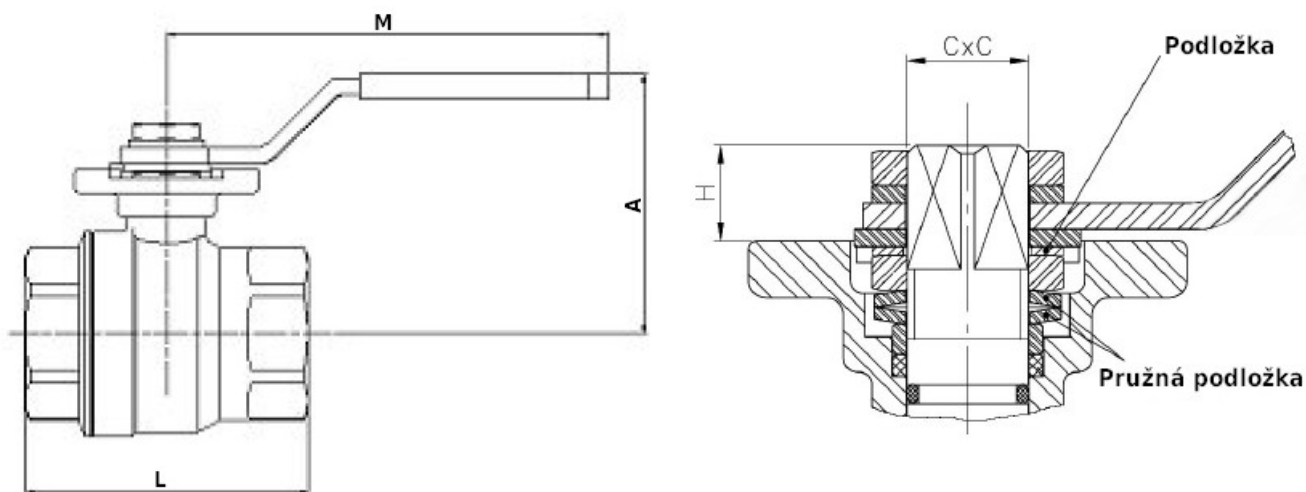

DN	NPS	PN	A	H	L	M	Kv	ISO	C	Moment	Váha
[mm]	[Inch]	[mm]	[mm]	[mm]	[mm]	[mm]	[m ³ /h]	[mm]	[mm]	[Nm] **	[kg]
8	1/4"	63	62	10	50	112	6	F03	9x9	4	0,30
10	3/8"	63	62	10	50	112	10	F03	9x9	4	0,30
15	1/2"	63	63	11	55	112	24	F03/F04	9x9	4	0,35
20	3/4"	63	70	11	70,5	138	43	F04/F05	11x11	8	0,56
25	1"	63	70	11	83	138	83	F04/F05	11x11	10	0,78
32	1 1/4"	63	88	15	91	160	130	F05/F07	14x14	14	1,35
40	1 1/2"	63	94	15	103	205	205	F05/F07	14x14	20	1,9
50	2"	63	100	15	120	205	340	F05/F07	14x14	30	2,83

** krútiaci moment bez bezpečnostného faktora

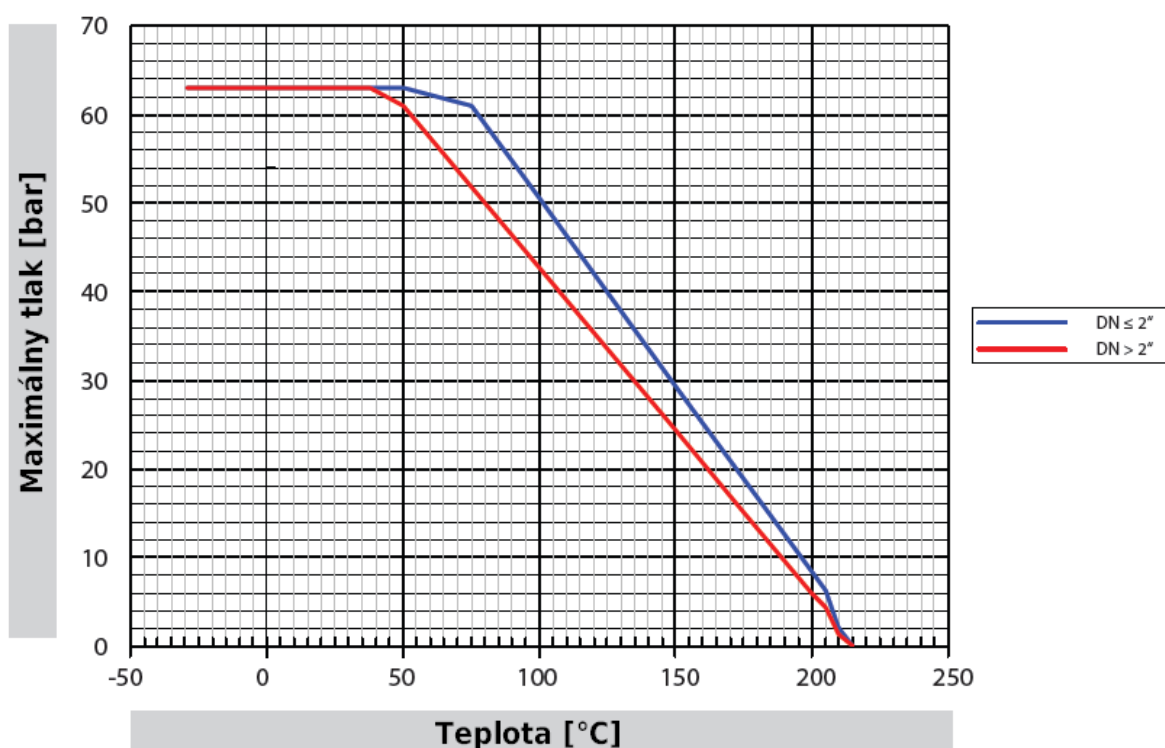

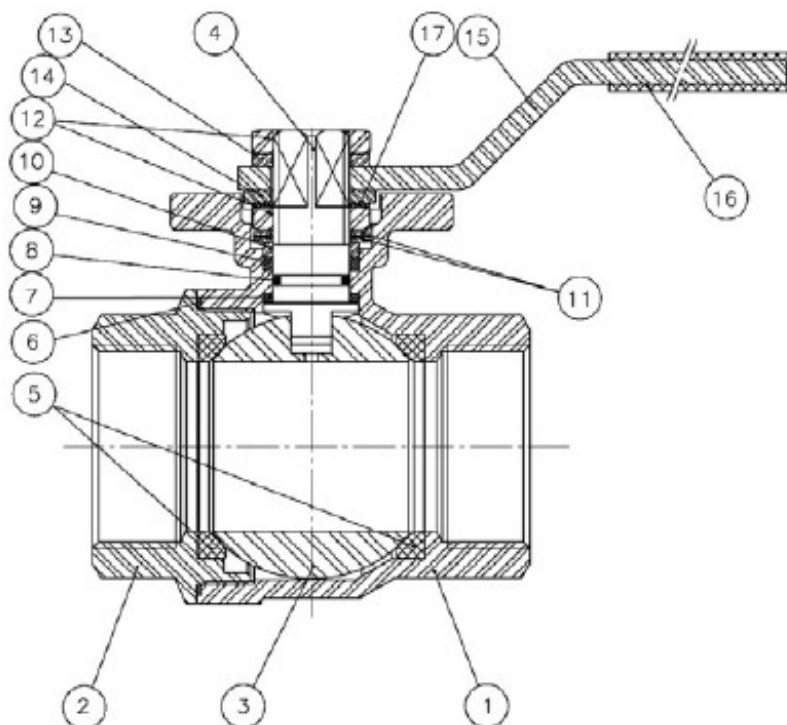

Poz.	Popis	Materiál
1	Teleso	1.4408
2	Závitová koncovka	1.4408
3	Guľa	1.4408
4	Vreteno	1.4408
5	Sedlá	PTFE + 15% sklo
6	Tesnenie	PTFE
7	Podložka	PTFE + grafit
8	O-kružok	Viton
9	Upchávka	PTFE
10	Podložka	1.4301
11	Podložka	1.4310
12	Matica	1.4301
13	Podložka	1.4301
14	Doraz	1.4301
15	Páka	1.4301
16	Bužírka	Plast
17	Podložka	1.4301