

# Oceľové guľové kohúty/Steel ball valves


konce privarovací / vonkajší závit so zátkou / male threads and plug / welding, EN (DIN), DN 15-25, redukovaný prietok / reduced bore

|                            |   |
|----------------------------|---|
| Teleso/Body                | DN 15-25 Oceľ / Steel, P235GH (1.0345)                      |
| Guľa/Ball                  | DN 15-25 Nerez oceľ / Stainless steel, X5CrNi18-10 (1.4301) |
| Sedlo/Ball seal            | DN 15-25 PTFE+C   |
| Vreťeno/Stem               | DN 15-25 Stainless steel, X8CrNiS18-9 (1.4305)              |
| Tesnenie vreťena/Stem seal | DN 15-25 FPM  |
| Ovládanie/Operation        | DN 15-25 páka pozinkovaná oceľ / zinc-plated steel handle   |
| Vybavenie/Equipment        | DN 15-25 vybavený zátkou / are equipped with plug and chain |




## Podmienky použitia/ Operation conditions

-30 °C – +200 °C Pod / Below 0 °C  
kontaktovať výrobcu / contact  
manufacturer  
Trieda tesnosti / Leakage rate A (EN  
12266-1)

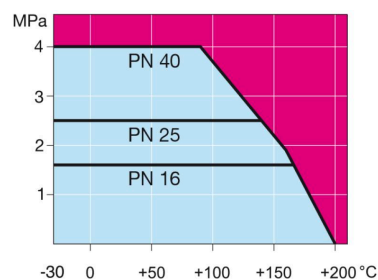

DN 15-25

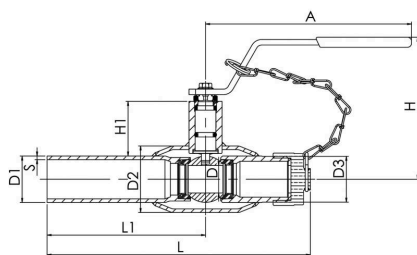

Neplatí pre paru / Not for steam

| DN | PN | Typové číslo/Product no. | A   | D  | D1   | D2   | D3    | H   | H1 | L   | L1  | S   | kg  |
|----|----|--------------------------|-----|----|------|------|-------|-----|----|-----|-----|-----|-----|
| 15 | 40 | 101015/G                 | 145 | 10 | 21.3 | 33.7 | G 3/4 | 100 | 22 | 167 | 115 | 2   | 0.5 |
| 20 | 40 | 101020/G                 | 145 | 15 | 26.9 | 42.4 | G 3/4 | 103 | 23 | 172 | 115 | 2.3 | 0.6 |
| 25 | 40 | 101025/G                 | 144 | 20 | 33.7 | 48.3 | G 1   | 118 | 34 | 175 | 115 | 2.6 | 0.9 |