

Oceľové guľové kohúty / Steel ball valves


konce privarovacie / privarovacie / welding / welding, EN (DIN), DN 100-600, redukovaný prietok / reduced bore

Teleso/Body	DN 100-500 Steel, P235GH (1.0345) DN 600 Steel, P355 NL1 (1.0566) / GP240GH (1.0619)
Guľa/Ball	DN 100-600 Stainless steel, X5CrNi18-10 (1.4301)
Sedlo/Ball seal	DN 100-600 PTFE+C
Vreťeno/Stem	DN 100-600 Stainless steel, X8CrNiS18-9 (1.4305)
Tesnenie vretena/Stem seal	DN 100-600 FPM
Ovládanie/Operation	DN 100-600 s ručným prevodom / equipped with manual gear




Podmienky použitia / Operation conditions

-30 °C – +200 °C Pod / Below 0 °C
kontaktovať výrobcu / contact manufacturer
Trieda tesnosti / Leakage rate A (EN 12266-1)

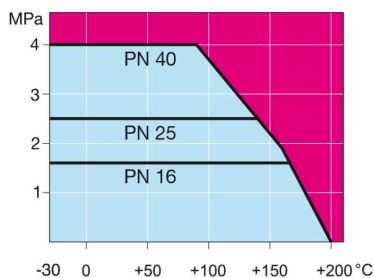


Neplatí pre paru / Not for steam

DN 100-600

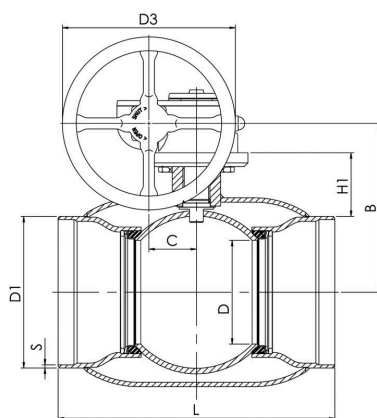

DN 100-600

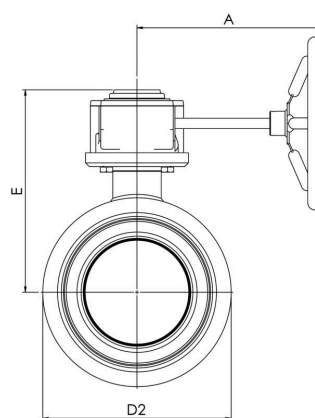

DN	PN	Product no. Vexve	A	B	C	D	D1	D2	D3	E	H	L	S	kg
100	25	104100	186	196	53	80	114.3	146.0	125.0	239	105	325	3,6	18.0
125	25	104125	224	216	53	100	139.7	177.8	200.0	259	112	325	4	20.0
150	25	104150	224	236	53	125	168.3	219.1	200.0	279	118	350	4,5	25.0
200	25	104200	268	244	69	150	219.1	273.0	250.0	293	92	400	4,5	49.0
250	25	104250	301	294	97	200	273.0	355.6	300.0	345	108	530	5	94.0
300	25	104300	363	343	117	250	323.9	457.0	500.0	412	132	550	5,6	152.0
350	25	104350	363	418	117	290	355.6	508.0	500.0	487	192	686	6,3	212.0
400	25	104400	444	500	138	340	406.4	610.0	500.0	573	242	762	7	293.0
500	25	104500	475	577	180	390	508.0	660.0	500.0	648	259	914	7	467.0
600	25	104600	475	644	180	489	610.0	813.0	500.0	715	274	1065	7,1	1025.0

*DN 700–800 tiež dostupné v PN40 / also available in PN40. Pre viac informácií nás prosím kontaktujte. / For more information please contact us.

Oceľové guľové kohúty / Steel ball valves

konce privarovacie / privarovacie / welding / welding, EN (DIN), DN 700-800, redukovaný prietok / reduced bore

Teleso/Body DN 700-800 Oceľ / Steel, P355 NL1 (1.0566) / GP240GH (1.0619)

Guľa/Ball DN 700-800 Oceľ / Steel + nerez povlak / stainless plating, ASTM A350 LF2+Ni

Sedlo/Ball seal DN 700-800 PTFE+C

Vreťeno/Stem DN 700-800 Nerez oceľ / Stainless steel, X8CrNiS18-9 (1.4305)

Tesnenie vretena/Stem seal DN 700-800 FPM

Ovládanie/Operation DN 700-800 ručný prevod / equipped with manual gear


Výbava/Equipment DN 700-800 vybavený vypúšťacím ventilom, montážnym stojanom a zvedacími okami / equipped with drain valve, mounting stand, lifting lugs



Podmienky použitia / Operation conditions


-30 °C – +200 °C Pod / Below 0 °C
kontaktovať výrobcu / contact manufacturer

Trieda tesnosti / Leakage rate A (EN 12266-1)

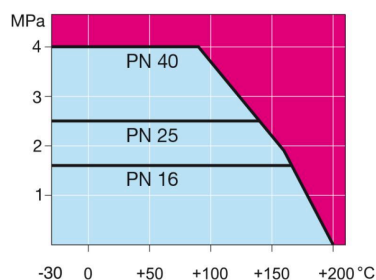


Neplatí pre paru / Not for steam

DN 700-800

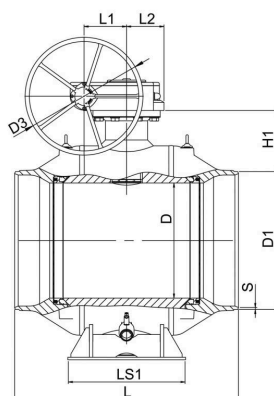

DN 700-800

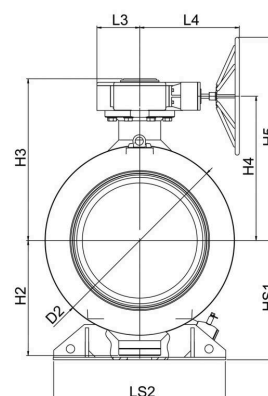

DN	PN	Typ. číslo/Product no.	D	D1	D2	D3	H1	H2	H3	H4	H5	HS1	L	L1	L2	L3	L4	LS1	LS2	S	kg
700	25	104700	589	711.0	965.0	700.0	336	592	881	778	1128	616	1205	253	222	255	593	560	965	8	2700.0
800	25	104800	684	813.0	1125.0	700.0	365	684	961	858	1208	709	1330	253	222	255	593	700	1028	8.8	4050.0

*DN 700-800 tiež dostupné v PN40 / also available in PN40. Pre viacej informácií nás prosím kontaktujte. / For more information please contact us.